

## Pressure transmitter COMPACT

for diaphragm seal operation, hygienic

Type series CC60 . . -F



### Application area

- Food industry
- Pharmaceutical industry
- Biotechnology

### Features

- Measuring ranges 0...250 mbar up to 0...100 bar
- Linearity error including hysteresis <+ 0.2 % f.s.
- Piezoresistive measuring system
- Hygienic design according to EHEDG, FDA und GMP recommendations
- Material and surface quality according to the hygienic requirements
- Wetted parts of stainless steel; completely welded
- Stainless steel housing as standard or field housing
- Degree of protection IP 65, IP 67 option
- Various output signals
- Process temperature up to 200 °C

### Options

- Labom REconnect quick coupling device for easy and safe separation and connection of diaphragm seal systems; Type series MK1000, see data sheet D6-022
- Explosion protection for gases
- As per UKCA regulations
- Classification per SIL 2
- Inspection certificate: material certificate as per EN 10204-3.1

### Application

The pressure transmitter COMPACT acts as a highly accurate converter of pressure measurements to load-independent current signals (4...20 mA, for example). Special attention has been given to a hygienic design. The completely welded stainless steel housing can be designed up to protection type IP 67. The use of temperature decouplers means that the COMPACT pressure transmitter can be used for process temperatures up to 200 °C.

## Case design

### Designs

- field housing IP 65 or IP 67, with cable gland
  - right-angle plug per DIN EN 175301-803-A (DIN 43650, Form A), IP 65,
  - cable connection, IP 67
  - circular connector M12, IP 65
- case material stainless steel  
union nut: polyamide (with plug connector or cable connection for electr. connection)  
electronics encapsulated with silicone.  
Inner chamber aeration for measuring ranges < 16 bar over case thread or connection cable (depending on design)

## Process connection

see next page or order code for variants  
material-Nr.: 1.4404 (316L) for the sleeves

## Temperature ranges

ambient temperature range: -25...+70 °C  
option: -40...85 °C  
storage temperature range: -10...+90 °C  
process temperature: see order details

## Measuring ranges/overrange limits

see order details  
intermediate measuring ranges upon request

## Response time

≤ 20 ms

## Measuring accuracy

linearity error incl. hysteresis:  
≤ 0.2 % f.s.  
≤ 0.3 % f.s. for measuring ranges ≤ 0...60 bar  
fixed-point adjustment accuracy of adjustment:  
<± 0.2 % f.s.

## Temperature effect

### a) case

in compensated temperature range  
0...50 °C:

- zero point ≤ 0.2 %/10 K
- span ≤ 0.2 %/10 K

in compensated temperature range  
-40...0 °C and 50...85 °C

- typical 0.3 %/10 K
- max. 0.3 %/10 K

### b) process connection (diaphragm seal) depending on design

flat diaphragm	seal zero error
DN 25/1"	4.8 mbar/10 K
DN 32/1 1/2"	2.3 mbar/10 K
DN 40	1.6 mbar/10 K
DN 50/2"	0.6 mbar/10 K
inline diaphragm	seal zero error
DN 25/1"	9.5 mbar/10 K
DN 32/1 1/2"	4.1 mbar/10 K
DN 40	3.9 mbar/10 K
DN 50/2"	3.9 mbar/10 K

The specified zero error for the process connection is a guide value for a standard design. We can provide a detailed system calculation upon request. Systems with reduced diaphragm seal errors are also available.

## Auxiliary energy supply

standard design:

- nominal voltage 24 V DC
- function range 6...30 V DC
- max. allowable operating voltage 30 V DC

## Supply voltage influence

≤ 0.01 % f.s. / V

## Output signal

4...20 mA, 2-wire technology  
0...20 mA, 3-wire technology  
4...20 mA, 3-wire technology  
0...10 V, 3-wire technology

## Current limitation in output signal

max. output current approx. 30 mA

## Adjusting range

approx. ± 5 % f.s., zero point and measuring span separately adjustable

## Burden

standard design  $R_a = \frac{U_B - 6 V}{20 \text{ mA}}$  (KOhm)  
 $U_B$  = operating voltage  
 $R_a$  = max. permissible burden resistance (incl. lead)

## Burden influence

for 500 ohm burden change: ≤ 0.1 % f.s.

## Functional safety

EN 61508, classification per SIL 2,  
TÜV-Reg.-No. 44 799 13190204

## Ex-approval

ATEX:  
TÜV 00 ATEX 1557 X  
marking:

 II 2 G Ex ib IIC T6 Gb

- $U_{max}$  ≤ 30 V DC
- $I_{max}$  ≤ 150 mA
- $P_{max}$  ≤ 1 W
- $Ci_{max}$  ≤ 49 nF
- Li ≤ 33 µH

Further technical data see Ex-instruction  
XA\_006.

## Weights (without diaphragm seal)

- field housing: approx. 460 g
- case with connector: approx. 200 g


## Installation position

any


## EMC test

- noise immunity according to EN 50082 section 2, version March 1995 issue for industry
  - emitted interference according to EN 50081 section 1, 1993 issue for residential and industrial areas
- Device emits no radiation of its own


# Dimensions

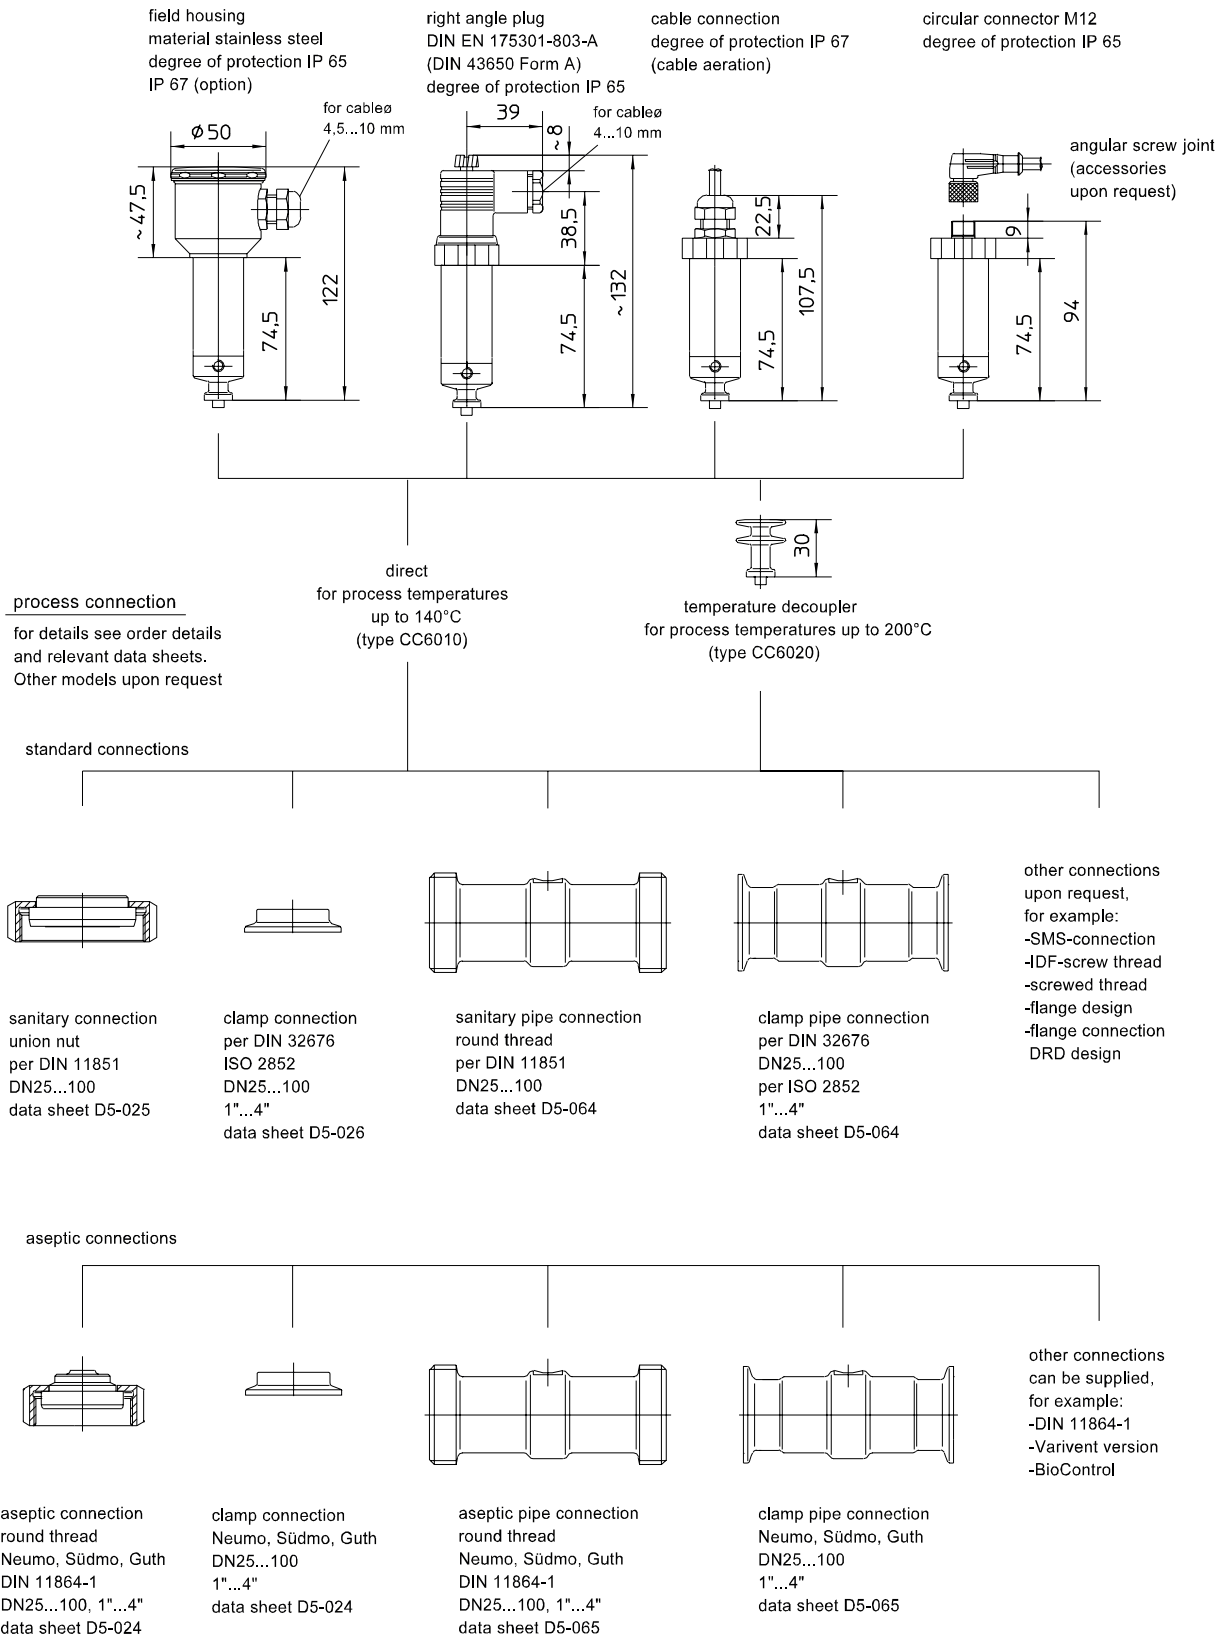


# Connection diagram

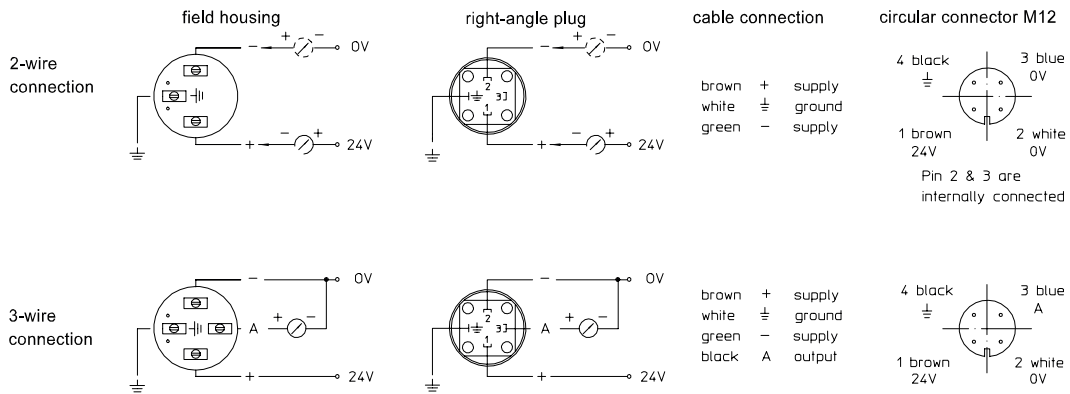

Standard position of el. connections.  
Pls. specify different position.

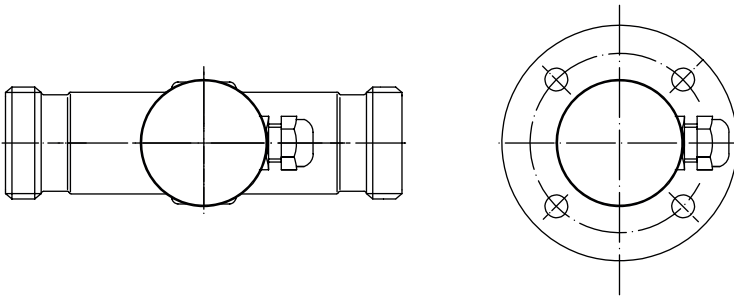

## Order details

Pressure transmitter COMPACT for food /pharmaceutical/bioengineering			
design	· for process temperature to + 140 °C		CC601 .-F
	· for process temperature to + 200 °C		CC602 .-F
Ex protection	· without		0
	·  II 2G EEx ib IIC T6		1
meas. range	meas. range	overload limit (bar)	
	0...250 mbar <sup>3</sup>	1	A1010
	0...400 mbar <sup>3</sup>	3	A1011
	0...0.6 bar	3	A1052
	0...1 bar	3	A1053
	0...1.6 bar	10	A1054
	0...2.5 bar	10	A1055
	0...4 bar	20	A1056
	0...6 bar	60	A1057
	0...10 bar	60	A1058
	0...16 bar	60	A1059
	0...25 bar	60	A1060
	0...40 bar	100	A1061
	0...60 bar	200	A1062
	0...100 bar	200	A1063
	-250...0 mbar <sup>3</sup>	1	A1027
	-400...0 mbar <sup>3</sup>	3	A1028
	-0,6...0 bar <sup>1</sup>	3	A1085
	-1...0 bar <sup>1</sup>	3	A1086
	-1...0.6 bar <sup>1</sup>	10	A1087
	-1...1.5 bar <sup>1</sup>	10	A1088
	-1...3 bar <sup>1</sup>	20	A1089
	-1...5 bar <sup>1</sup>	20	A1090
	-1...9 bar <sup>1</sup>	60	A1091
	-1...15 bar <sup>1</sup>	60	A1092
	0...1 bar abs	3	B1053
	0...1.6 bar abs	10	B1054
	0...2.5 bar abs	10	B1055
	0...4 bar abs	10	B1056
	0...6 bar abs	60	B1057
	0...10 bar abs	60	B1058
	measuring range as in writing		
output signal	· 4...20 mA, 2-wire technology, standard		H1
	· 0...20 mA, 3-wire technology		H2
	· 4...20 mA, 3-wire technology		H3
	· 0...10 V, 3-wire technology		H4
case/ electrical connections	· field housing of stainless steel, with cable gland	IP 65, measuring ranges ≤ 16 bar, only <sup>4</sup>	T410
		IP 67	T420
	· right angle plug according to DIN EN 175301-803-A (DIN 43650, Form A), IP 65		T110
	cable connection IP 67	· 2 m cable length	T310
		· 5 m cable length	T311
		· 10 m cable length	T312
		· cable length as in writing	T319
· circular connector M12, IP 65 <sup>2</sup>		T120	
continued next page			

- <sup>1</sup> negative relative pressure ranges (e.g. -1...+1 bar) are adjusted at works to 0...100%, e.g. 4...20mA.  
Long-term vacuum measurements at temperatures above +50°C may cause changes in the properties of the measurement device.  
Vacuum-proof designs are available upon request
- <sup>2</sup> connector with cable see product group D6 (accessories)
- <sup>3</sup> low pressure ranges with increased temperature influence (zero point and span): max. = 0.4 %/10K
- <sup>4</sup> not valid for absolute pressure

